Coffeemaker "CaféTherm"

HD5750/A

Service
Service
Service



Domestic Appliances and Personal Care Division

Service Manual

PRODUCT INFORMATION

HD 5750/A	: coffeemaker with insulated jug
Colour	: white
Voltages	: 220 V- 240 V - 100 V
Power	: 850 W
Contents insulated jug	: 1000 ml (10 cups of 100 ml)
Temperature outflowing water	: 98°C
Brewing temperature in ground	: 96°C
Brewing time	: 9 min ("MAX" volume) : 4 min ("MIN" volume)
Temp. directly after brewing	: 87°C ("MAX" volume) : 81°C ("MIN" volume)
Keep-warm temp. after 3 hrs	: 77°C (full jug) : 71°C (jug half filled)

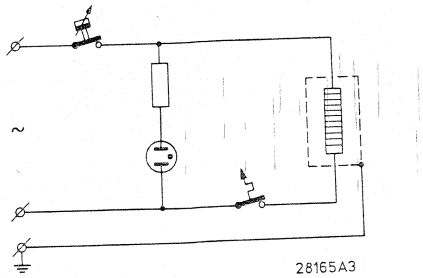

SERVICE INFORMATION

Thermostat switch-off temp.	: 125°C ± 5°C
Thermal fuse switch-off temp.	: 167°C
Series-resistor pilot lamp	: 47 KΩ (220 V/240 V) : 22 KΩ (100 V/120 V)

Thermal fuse

When the appliance does not work, check the thermal fuse. If this item proves defective, check the electrical circuit and also check whether perhaps the water system is clogged by scale.

De-scaling

If the water system is (nearly) clogged by scale, clean (by means of drilling with a drill of 7.5 mm diameter) the pump outlet and the exhaust pipe.
Assemble the appliance and operate it once or twice with ordinary vinegar or a 10-15% solution of either vinegar-acid, citric-acid or tartar-acid in cold tap water.
Do not use other de-scaling agents as they may be harmful to the appliance.
After the de-scaling procedure, operate the coffee maker 2 times with clean water in order to rinse away any residual substance from vinegar or acid.

DocumentationTechnique Service Dokumentation Documentazione di Servizio Huolte-Ohje Manual de Servicio Manual de Serviçio

Subject to modification
4822 729 20844
Printed in The Netherlands
©Copyright reserved

PHILIPS

HD5750/A

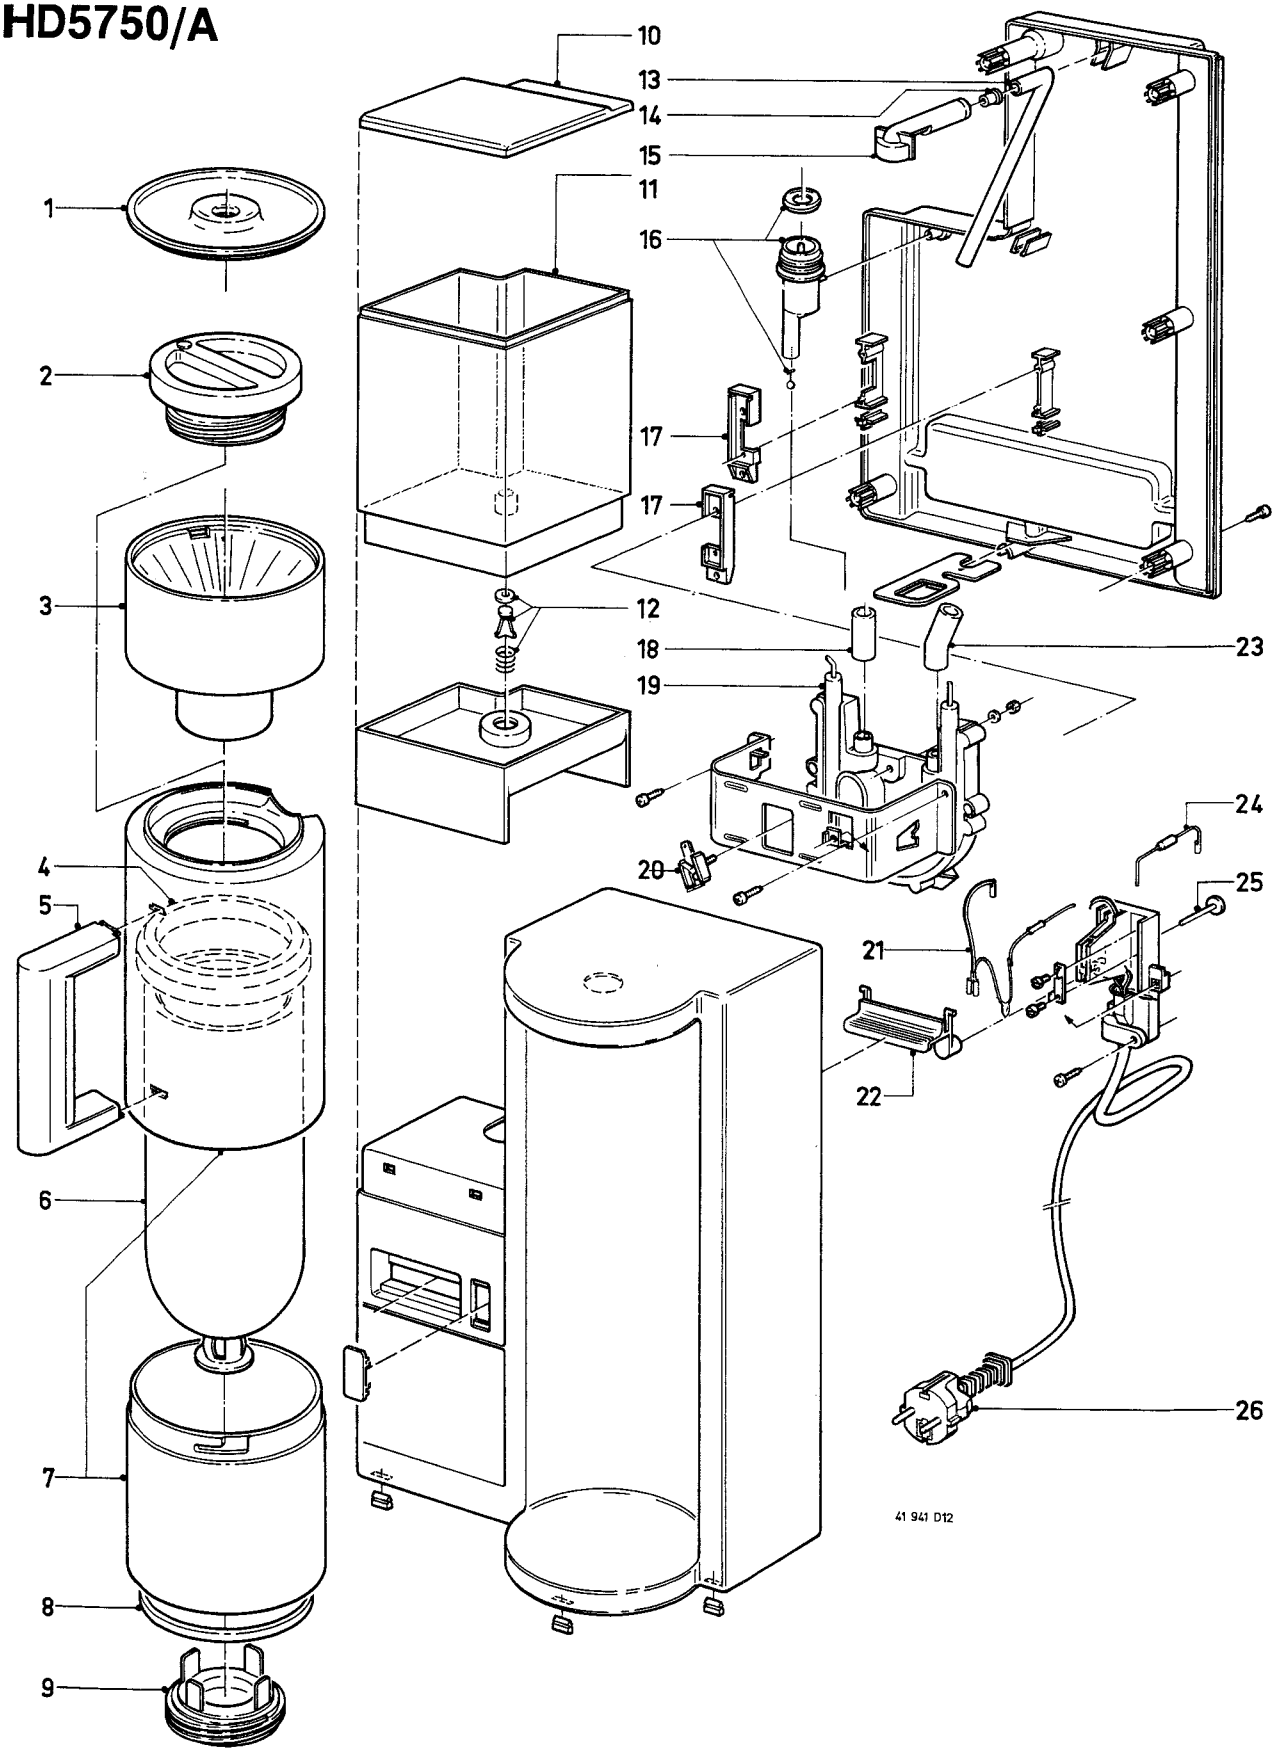

			7	4822 441 30931	1)	15	4822 529 20038		21	4822 134 20267	(220 V/240 V)
			8	4822 532 61089	1)	16	4822 360 50714		21+24	4822 252 20196	(100 V)
1	4822 441 30928		9	4822 441 30926	1)	17	4822 441 30924		22	4822 410 26131	
2	4822 441 30929	1)	10	4822 441 30925		18	4822 532 61092		23	4822 532 61087	
3	4822 480 50362		11	4822 418 40572		19	4822 259 20267	(220 V)	24	4822 252 20195	(220 V/240 V)
4	4822 532 61088	1)	12	4822 360 50394			4822 259 20268	(240 V)	24+21	4822 252 20196	(100 V)
5	4822 441 30927	1)	13	4822 530 40403			4822 259 20269	(100 V)	25	4822 535 71236	
6	4822 418 40571	1)	14	4822 532 61091		20	4822 282 40229		26	4822 321 10347	(EU)

1) Complete insulated jug: 4822 015 70018 (HD 5999)

CS 12 087